

Spot Light SSV--5UG11-00-00 YXR660FAS (Rhino 660)



Please read and understand these instructions completely before installation to avoid injury to your self or damage to the vehicle or accessory.


Dealer: These instructions contain important information for future reference, please give to customer.

1. Parts List:

Item	Part Number	Part Name	Description	Qty
1	SSC-5UG11-11-10	Spot Light		1
2	SSC-5UG11-11-20	Arm		1
3	SSC-5UG11-11-30	Ball Mount Base	Black	1
4	SSC-5UG11-12-10	Ball Mount Base Strap	Steel Clamp	1
5	SSC-5UG12-12-20	Strap Sheath	Rubber	1

2. Preparation:


- Open/unscrew Ball Mount Base Strap (Item #4), and slide Strap Sheath (Item #5) onto open end of Strap. Slide onto strap as far as possible.
- Determine location on 1.75" vehicle enclosure tubing to mount Ball Mount Base (Item #3).

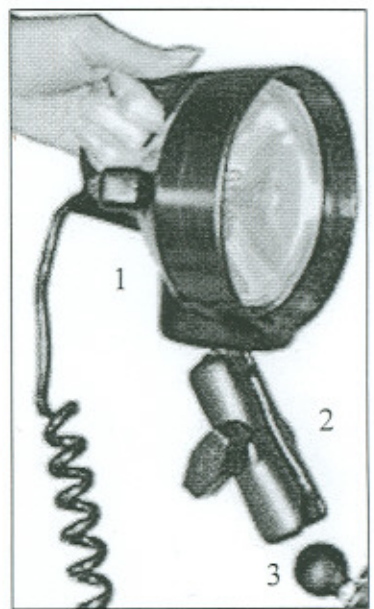

3. Installation:

- Place accessory Ball Mount Base (Item #3) onto desired mounting location, and secure to tubing with the Ball Mount Base Strap (Item #4). Tighten securely.
- Install Spot Light (Item #1) and Arm (Item #2) onto Ball Mount Base. Tighten Arm knob securely. NOTE: Loosen Arm knob to adjust Spot Light position, and loosen more to remove.
- To operate Spot Light, place the 12V DC plug end into a 12V DC receptacle (one is provided in the Rhino dash area).

CAUTION...Do not operate the vehicle with the Spot Light or coiled cable obstructing or interfering with the driver and/or the operation of the vehicle control devices (i.e., steering wheel, pedals, shifter, parking brake). Avoid placing the coiled cable in any position that interacts with the driver while the vehicle is in operation.

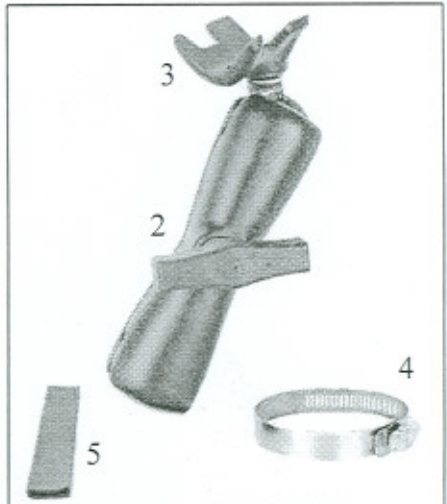

4. Maintenance, Care & Cleaning:

Periodically check fasteners for tightness. Clean using a soft cloth with soap and water.

5. Customer Service:

For further information, see your Yamaha dealer.